

Required materials (for both Mainline and Ramp logo signs)

- Must be from a single sheet of 0.080" thick, 5052H38 aluminum
- Aluminum must be treated in accordance with the FDOT Standard Specifications


Reflective Sheeting

- Aluminum blanks must be de-greased and etched prior to the application of reflexive sheeting
- Type III Encapsulated High Intensity Sheeting must be applied in accordance with the manufacturers' specifications

Logo Designs – Art Work

- Lettering size for Mainline logo signs must be a minimum of 10"
- Lettering size for Ramp logo signs must be a minimum of 6"
- Any legend of a symbol or trademark must be in proportion to the size of the symbol or trademark
- All logo art designs must be approved by FDOT

Mainline

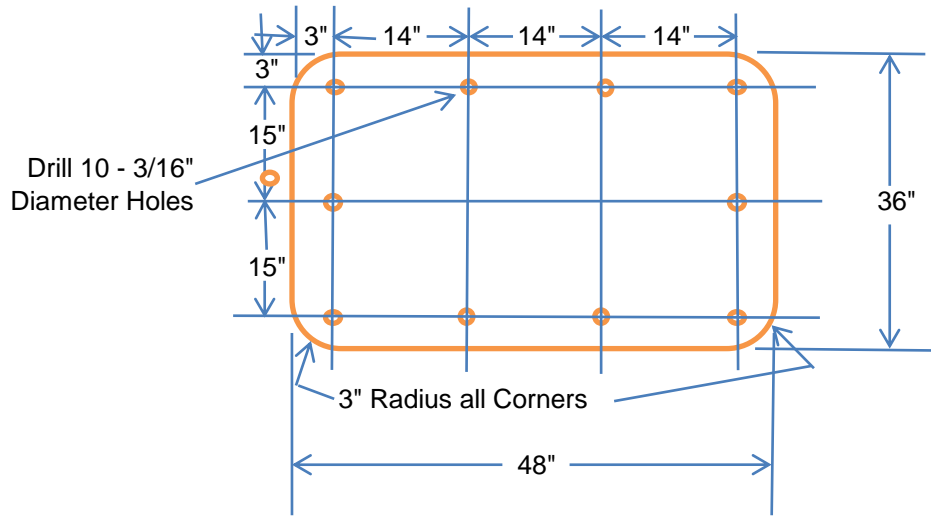

Ramp

